

KPC-S190C

+ zoom

- » 1/3" Sony Super HAD CCD
- » Standard Resolution of 380 TVL
- » Fixed Iris Board, Pinhole, Door View Lens
- » Min. Illumination of 0.5 Lux/F2.0
- » Super Compact Size of Φ 19(mm) Dimension
- » Waterproof (IP67) (KPC-S190CWX Only)
- » Options : 1/3" Sony Exview CCD, Digital Day&Night, Mirror Mode, DC3.3V Low Voltage

[Related Downloads](#)
OPTIONAL LENS


KPC-S190CB



KPC-S190CP1



KPC-S190CP4



KPC-S190CDV


SPECIFICATION

Model Name	KPC-S190C
Image Device	1/3" SONY Super HAD CCD
Scanning System	2:1 Interlace
Scanning Frequency	NTSC : 15.734 KHz(H), 59.94 Hz(V)
	PAL : 15.625 KHz(H), 50 Hz(V)
H. Resolution	380 TVL
Total Pixels	NTSC : 811(H) x 508(V) / PAL : 795(H) x 596(V)
Effective Pixels	NTSC : 768(H) x 494(V) / PAL : 752(H) x 582(V)
S/N Ratio	More than 45dB (AGC Off)
Min. Illumination	0.5 Lux / F2.0
Sync. System	Internal
Gamma	$\gamma = 0.45$
Video Output	1.0 Vp-p Composite (75 Ω)
Lens	Fixed Board Lens / Pinhole Lens / Door View Lens
Electronic Shutter	NTSC : 1/60~1/100,000 sec / PAL : 1/50~1/100,000 sec
Day & Night	Digital Day & Night
IP Rating	IP67 (Waterproof) for KPC-S190CWX Only
Operating Temperature	14°F ~ 122°F (-10°C ~ +50°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ +60°C)
Humidity	Less than 80%
Power Consumption	DC12V (\pm 10%), Max. 120mA
Dimensions (mm)	Φ 19 X 79.5
Weight	Approx. 83g

LENS OPTIONS

Type	Board Lens					Pinhole Lens			Door View Lens
						P1	P3	P4	
Focal Length	2.97	3.6	6	8	12	3.7	3.7	4.3	1.78
Aperture	F2.0	F2.0	F2.0	F2.0	F2.2	F2.0	F2.0	F2.0	F3.0
Angle of View	130°	92°	53°	40°	28°	90°	90°	78°	170°

DIMENSIONS

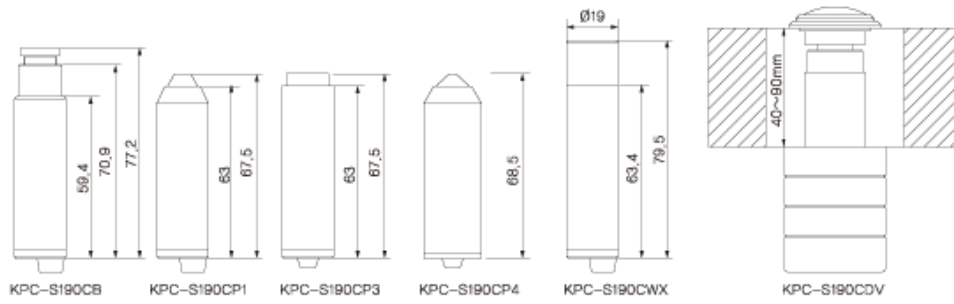

MOUNTING POSITION

