

KPC-S190S

+ zoom

- » 1/3" Sony Super HAD CCD
- » Std-Res. (420TVL) / High-Res. (600TVL)
- » Fixed Iris Board, Pinhole, Door View Lens
- » Min. Illumination of 0.05 Lux/F2.0(Std-Res.) 0.1 Lux/F2.0(High-Res.)
- » Super Compact Size of Φ 19(mm) Dimension
- » Waterproof (IP67) : KPC-S190S(H)WX Only
- » Options : 1/3" Sony Exview CCD

[Related Downloads](#)
OPTIONAL LENS


KPC-S190SB



KPC-S190SP



KPC-S190SP1



KPC-S190SP3



KPC-S190SP4



KPC-S190DV


SPECIFICATION

Model Name	KPC-S190S	KPC-S190SH
Image Device	1/3" SONY Super HAD CCD	
Scanning System	2:1 Interlace	
Scanning Frequency	EIA : 15.734 KHz(H), 59.94 Hz(V)	
	CCIR : 15.625 KHz(H), 50 Hz(V)	
H. Resolution	420 TVL	600 TVL
Total Pixels	EIA : 537(H) x 505(V) / CCIR : 537(H) x 597(V)	EIA : 811(H) x 508(V) / CCIR : 795(H) x 596(V)
Effective Pixels	EIA : 510(H) x 492(V) / CCIR : 500(H) x 582(V)	EIA : 768(H) x 494(V) / CCIR : 752(H) x 582(V)
S/N Ratio	More than 50dB (AGC Off)	
Min. Illumination	0.05 Lux / F2.0	0.1 Lux / F2.0
Sync. System	Internal	
Gamma	$\gamma = 0.45$	
Video Output	1.0 Vp-p Composite (75 Ω)	
Lens	Fixed Board Lens / Pinhole Lens / Door View Lens	
Electronic Shutter	EIA : 1/60~1/100,000 sec / CCIR : 1/50~1/100,000 sec	
IP Rating	IP67 (Waterproof) for KPC-S190S(H)WX Only	
Operating Temperature	14°F ~ 122°F (-10°C ~ +50°C)	
Storage Temperature	-4°F ~ 140°F (-20°C ~ +60°C)	
Humidity	Less than 80%	
Power Consumption	DC12V (\pm 10%), Max. 80mA	
Dimensions (mm)	Φ 19 x 61.4	
Weight	Approx. 83g	

LENS OPTIONS

Type	Board Lens						Pinhole Lens				Door View Lens
							P	P1	P3	P4	
Focal Length	2.45	2.97	3.6	6	8	12	3.7	3.7	3.7	4.3	1.78
Aperture	F2.0	F2.0	F2.0	F2.0	F2.0	F2.2	F2.0	F2.0	F2.0	F2.0	F3.0
Angle of View	150°	130°	92°	53°	40°	28°	90°	90°	90°	78°	170°

DIMENSIONS

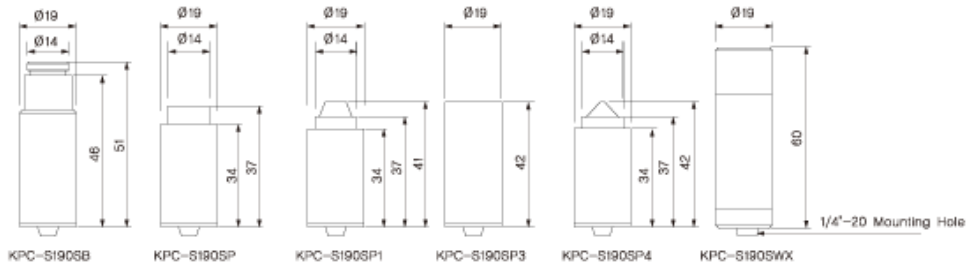

MOUNTING POSITION

